


HOSE ASSEMBLIES

**CAN BE USED IN ZONE 1-2 (GAS) ZONE 21-22 (DUST) ,
ZONE 21-22 (DUST) AND ZONE 22 (DUST) ONLY**

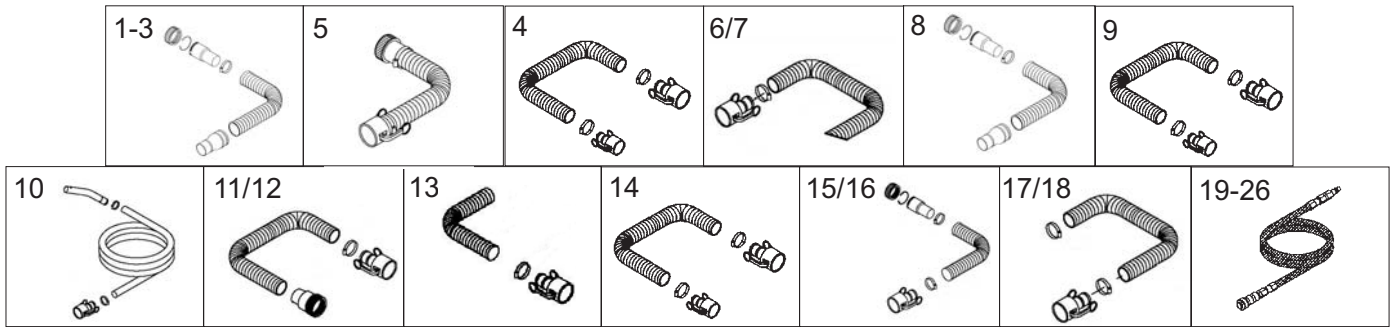

1	381400	Kanaflex suction hose assembly, SD*, ø38mm x 3m for ø38mm camlock intake, aluminum. For 60/100 litre models	
2	381400B	Kanaflex suction hose assembly w/hose cuff and ring, for use with ø50mm intake. SD*. Ø38mm. For models EXP1/SS-20 (DT) MFS and HLMT EX Series	
3	381406	Kanaflex suction hose assembly, SD*, ø38mm x 4.5m. For 180 litre models with ø50mm suction intake	
4	381396B	Kanaflex connection hose, SD*, ø38mm x 1m with ø50mm female camlock and ø38mm female camlock for IT-25 (4W), aluminum	
5	500305C	Kanaflex suction hose assembly, SD*, with wire, ø50mm x 3m	
6	381100	Nitrile suction hose assembly, SD*, ø19mm x 7.5m for 50 and 68 litre models	
	500126	Nitrile suction hose assembly, SD*, ø19mm x 7.5m for 180 litre models	
7	381050	Nitrile suction hose, SD*, ø38mm x 3m for ø38mm camlock intake, aluminum. For tools & accessories	
8	500117A	Nitrile connection hose, SD*, ø50mm x 1.5m, with ø50mm aluminum female camlock and ø50mm aluminum male screw type for AC-25	
9			
10	323455	EPDM suction hose, SD*, autoclavable, with smooth interior and exterior, ø32mm x 3m, with S/S** ends.	
11	381385B	EPDM suction hose, SD*, autoclavable, with smooth interior and exterior, ø38mm x 3m, with S/S** female screw type connector for ø38mm accessories and S/S** female camlock for ø50mm suction intake	
12	381385	EPDM suction hose, SD*, autoclavable, with smooth interior and exterior, ø38mm x 3m, with S/S** female camlock on one end and S/S** female screw type on the other	
13	211815	EPDM drain hose assembly, SD*, autoclavable, with smooth interior and exterior, ø19mm x 1.5m, with S/S** camlock	
14	500367	EPDM connection hose, SD*, autoclavable, with smooth interior and exterior, ø50mm x 1.5m, with S/S** female ø38mm and ø50mm camlock for HRS-25 (4W)	
15	381427	Clear Urethane suction hose assembly, SD*, ø38mm x 3.8m, with S/S** female camlock and S/S** female screw type	
16	381427B	Clear Urethane suction hose assembly, SD*, ø38mm x 3.8m, with ø38mm S/S** female screw type connector for ø38mm accessories and S/S** female camlock for ø50mm suction intake	
17	381387	Vinylife connection/suction hose assembly, SD*, ø38mm x 1.8m with ø38mm S/S** female camlock on one end	
18	500381	Vinylife connection/suction hose assembly, SD*, ø50mm x 1.8m with ø50mm S/S** female camlock on one end	
19	214712	Air supply hose assembly, SD*, ø3/8" x 15m with ø1/4" male quick disconnect and ø1/4" female quick disconnect for AFS and APS models	
20	211030	Air supply hose assembly, SD*, ø1/2" x 15m with quick disconnect fittings for single venturi models	
21	211832	Air supply hose assembly, SD*, 7.5m with smooth cover. Includes ø1/2" quick disconnect fittings	
22	214139	Air supply hose assembly, SD*, ø3/4" x 7.5m with 1 male quick disconnect and 1 female quick disconnect for SS-15/40 EX models	
23	211031	Air supply hose assembly, SD*, ø1" x 7.5m with quick disconnects	
24	211032	Air supply hose, SD*, ø1" x 15m with quick disconnect fittings for twin venturi models	
25	211030B	Air supply hose only, SD*, with ø1/2" male NPT brass on both ends. ø1/2" x 15m	
26	211032A	Air supply hose only, SD*, with ø1/2" male NPT brass on both ends. ø1" x 15m	


SD* - Static Dissipating

S/S** - Stainless Steel AISI 304

SC*** - Static Conductive

THE ABOVE PRICES ARE EXPRESSED IN € EURO FOB BOLOGNA, ITALIA - PRICES SUBJECT TO CHANGE WITHOUT NOTICE

HOSE ASSEMBLIES FOR ATEX ZONE 2 (GAS) AND ZONE 22 (DUST)

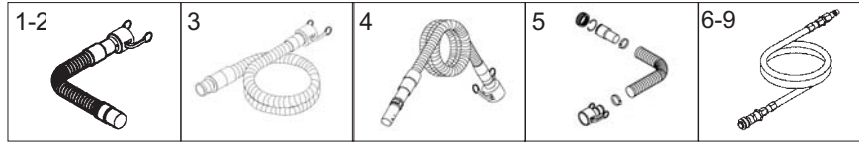

1	383440B	Crushproof suction hose assembly for ø50mm intake, SC*** (no wire), ø38mm x 3m. For AVSD-20 DT (MFS) and HLMT EX Series
2	381138G	Crushproof suction hose assembly, SC*** with regular hose cuff, ø38mm x 4.5m for CS-55 Single Venturi
3	500131	Crushproof suction hose assembly, ø50mm x 4.5m with ø50mm camlock intake for CS-55 Twin
4	323540	PVC Crushproof suction hose assembly, SD*, ø32mm x 3m, with straight S/S** handles & S/S** camlock for use with CD-1500 CR series
5	500395B	Clear Urethane suction hose assembly, SD*, ø50mm x 3.8m with ø50mm aluminum female camlock and ø50mm hose cuff for CS-11 (DT) series
6		Air supply hose assembly, ø1/4" x 15m with quick disconnect fittings for CS-40 (AFS) RE Twin Venturi
7	211029C	Air supply hose assembly, SD*, ø1/2" x 7.5m with Chicago/King fittings on one end and ø1/2" male NPT on the other end
8	214669	Air supply hose assembly, ø3/4" x 15m with quick disconnect fittings for CS-17 (MFS) RE Twin Venturi
9	213983	Air supply hose assembly, ø1" x 15m with quick disconnect fittings for CS-40 (RPS) RE Twin Venturi

HOSE ONLY FOR ATEX ZONE 2 (GAS) AND ZONE 22 (DUST) (Sold in increments of 1.5m)

1	250010 323430 383438 500538	Crushproof suction hose, SC*** (no wire), ø25.4mm, black Crushproof suction hose, SC*** (no wire), ø32mm, black Crushproof suction hose, SC*** (no wire), ø38mm, black Crushproof suction hose, SC*** (no wire), ø50mm, black
2	323340A 323340 381141 500140	PVC Crushproof suction hose, ø32mm, beige PVC Crushproof suction hose, ø32mm, grey PVC Crushproof suction hose, ø38mm, grey PVC Crushproof suction hose, ø50mm, grey
3	323440 381425 500390 635078 990010	Clear Urethane suction hose, SD*, ø32mm Clear Urethane suction hose, SD*, ø38mm Clear Urethane suction hose, SD*, ø50mm Clear Urethane suction hose, SD*, ø64mm Clear Urethane suction hose, SD*, ø100mm
4	381388	Foodgrade suction hose, ø38mm

HOSE ONLY CAN BE USED IN ZONE 1-2 (GAS) ZONE 21-22 (DUST) , ZONE 21-22 (DUST) AND ZONE 22 (DUST) ONLY (Sold in increments of 1.5m)

1	381398 500300	Kanaflex suction hose, SD*, ø38mm Kanaflex suction hose, SD*, ø50mm
2	381219A 381099 381105 381114 500114	Nitrile suction hose, SD*, ø19mm Nitrile suction hose, SD*, ø25.4mm Nitrile suction hose, SD*, ø38mm Nitrile suction hose, SD*, ø50mm Nitrile extension hose, SD*, ø12.7mm ID
3	211813A 323450 381383 500360	EPDM suction hose, SD*, ø32mm EPDM suction hose, SD*, ø38mm EPDM suction hose, SD*, ø50mm EPDM drain/discharge hose, SD*, ø19mm
4	323440 381425 500390 635078 990010	Clear Urethane suction hose, SD*, ø32mm Clear Urethane suction hose, SD*, ø38mm Clear Urethane suction hose, SD*, ø50mm Clear Urethane suction hose, SD*, ø64mm Clear Urethane suction hose, SD*, ø100mm
5	323425 381335 500380 635120	Vinylife suction hose, SD*, ø32mm Vinylife suction hose, SD*, ø38mm Vinylife suction hose, SD*, ø50mm Vinylife suction hose, SD*, ø64mm

SD* - Static Dissipating


S/S** - Stainless Steel AISI 304

SC*** - Static Conductive

THE ABOVE PRICES ARE EXPRESSED IN € EURO FOB BOLOGNA, ITALIA - PRICES SUBJECT TO CHANGE WITHOUT NOTICE

HOSE ACCESSORIES

**CAN BE USED IN ZONE 1-2 (GAS) ZONE 21-22 (DUST) ,
ZONE 21-22 (DUST) AND ZONE 22 (DUST) ONLY**

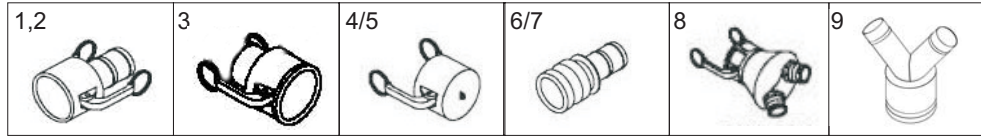

1	381096 381368 381247 500340 500176 635011 635212 990064 990065	Camlock Part C, female, ø19mm, S/S** Camlock Part C, female adaptor, ø38mm, S/S** Camlock Special Part C, ø38mm to ø32mm female adaptor with swivel, S/S** Camlock Part C, ø50mm, S/S** Camlock Special Part C, ø50mm adaptor to ø38mm female hose shank, S/S** Camlock Part C, female adaptor with hose shank, ø64mm, S/S** Camlock Special Part C, ø64mm female adaptor with ø50mm hose shank, S/S** Camlock Part C, female adaptor with hose shank, ø100mm, S/S** Camlock Special Part C, ø100mm female coupler with ø64mm hose shank, S/S**	
2	381097 213160 381229 381233 381233B 500163 500175 500338 635009 635010 760020 212457 990101	Camlock Part C, female connector with hose shank, ø19mm, aluminum Camlock Part C, female adaptor with hose shank, ø25.4mm, aluminum Camlock Part C, female adaptor, ø38mm, aluminum Camlock Special Part C, ø38mm female adaptor with ø19mm hose shank, aluminum Camlock Special Part C, ø38mm female adaptor with ø25.4mm hose shank, aluminum Camlock Part C, ø50mm, female with ø50mm hose shank, aluminum Camlock Special Part C, ø50mm female adaptor to ø38mm hose shank, aluminum Camlock Special Part C, ø64mm female camlock DC modified to ø50mm tube hose shank, aluminum Camlock Special Part C, ø64mm adaptor with ø50mm hose shank, aluminum Camlock Part C, female adaptor with hose shank, ø64mm, aluminum Camlock Part C, ø76mm, aluminum Camlock Part C, female adaptor with hose shank, ø100mm, aluminum Camlock Special Part C, ø100mm female coupler with ø50mm hose barb, aluminum	
3	381520	Camlock Part D, ø38mm female adaptor with female thread, S/S**	
4	381090 500334 635211 990058	Camlock Part DC (Dust Cap), ø38mm, S/S** Camlock Part DC (Dust Cap), ø50mm, S/S** Camlock Part DC (Dust Cap), ø64mm, S/S** Camlock Part DC (Dust Cap), ø100mm, S/S**	
5	381230 211114 635008 212455	Camlock Part DC (Dust Cap), ø38mm, aluminum Camlock Part DC (Dust Cap), latched, ø50mm, aluminum Camlock Part DC (Dust Cap), ø64mm, aluminum Camlock Part DC (Dust Cap), ø100mm, aluminum	
6	381367 500342	Camlock Part E (for extensions), ø38mm, S/S** Camlock Part E (for extensions), ø50mm male camlock with ø50mm hose shank, S/S**	
7	213162 381326 500343	Camlock Part E (for extensions), male adaptor with hose shank, ø25.4mm, aluminum Camlock Part E (for extensions), ø38mm, aluminum Camlock Part E (for extensions), ø50mm male camlock with ø50mm hose shank, aluminum	
8	635260B 635260A 990060A 990060B 990060C	Y Connector, ø64mm x ø38mm x ø38mm, S/S** Y Connector, ø64mm x ø50mm x ø50mm, S/S** Y Connector, ø100mm x ø64mm x ø64mm, S/S** Y Connector, ø100mm x ø50mm x ø50mm, S/S** Y Connector, ø100mm x ø38mm x ø38mm, S/S**	
9	635276 635278	Y connector, galvanized, ø50mm x ø50mm Y connector, galvanized, ø50mm x ø38mm	

SD* - Static Dissipating


S/S - Stainless Steel AISI 304**

SC* - Static Conductive**

THE ABOVE PRICES ARE EXPRESSED IN € EURO FOB BOLOGNA, ITALIA - PRICES SUBJECT TO CHANGE WITHOUT NOTICE

HOSE ACCESSORIES

**CAN BE USED IN ZONE 1-2 (GAS) ZONE 21-22 (DUST),
ZONE 21-22 (DUST) AND ZONE 22 (DUST) ONLY**

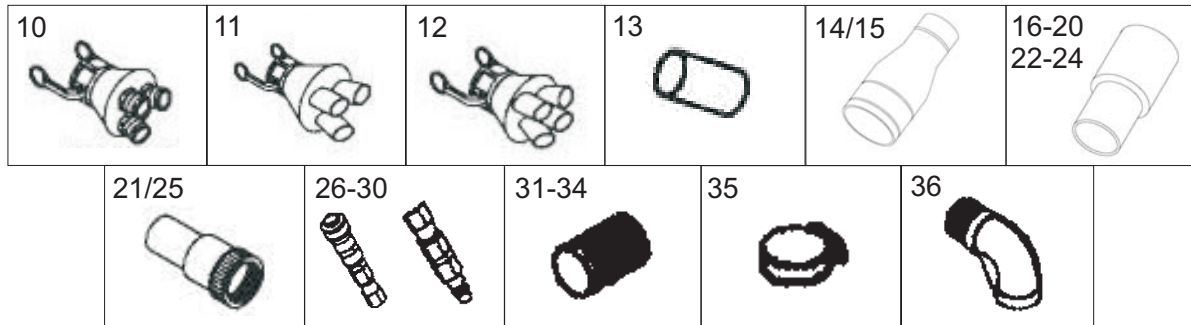

10	990062	3 Way connector, ø100mm x ø38mm x ø38mm x ø38mm. S/S**	
11	635262	3 Way pipe connector, ø64mm x ø32mm x ø32mm x ø32mm. S/S**	
12	990063	4 Way pipe connector, ø100mm x ø32mm x ø32mm x ø32mm x ø32mm. S/S**	
13	381147D	Connector/expander, male, for use with pressure fit hose, S/S**	
14	635274	Metal connector for suction hose, ø70mm to ø38mm. To be used with Crushproof & Kanaflex hoses for EUR-60/100	
15	635272	Metal connector for suction hose, ø70mm to ø50mm. To be used with Crushproof & Kanaflex hoses for EUR-60/100	
16	250012	Hose Cuff, SC***, ø25mm, black	
17	250014	Expander Hose Cuff, SC***, ø25.4mm to ø38mm, black	
18	323432	Hose Cuff, SC***, ø32mm, black	
19	323434	Hose Cuff, SC***, ø32mm to ø38mm, black	
20	383436	Hose Cuff, ø38mm, for SC*** Crushproof hose, made of conductive rubber	
21	381395	Hose Cuff, ø38mm, for Kanaflex hose, made of conductive rubber with S/S** ring	
22	383437	Swivel Hose Cuff, SC***, ø38mm, black	
23	383435	Expander Hose Cuff, SC***, ø38mm to ø50mm, black	
24	500536	Hose Cuff, ø50mm, for SC*** Crushproof hose, made of conductive rubber	
25	500298	Hose Cuff, ø50mm, for Kanaflex hose, made of conductive rubber with S/S** ring	
26	303126	Quick Disconnect, female, ø6.25mm with ø6.25mm female thread, brass	
27	211033B	Quick Disconnect, female, ø12.5mm with ø12.5mm female thread, brass	
28	211034B	Quick Disconnect, female, ø25.4mm with ø25.4mm female thread, brass	
29	211033A	Quick Disconnect, male, ø12.7mm with ø12.7mm female thread, brass	
30	211034	Quick Disconnect, male, ø25.4mm with ø25.4mm female thread, brass	
31	303123	Nipple, Hex, ø6.25mm, NPT brass	
32	211095C	Nipple, Hex, ø12.5mm, NPT brass	
33	212940	Nipple, ø19mm NPT x 50mm LG, S/S**	
34	211034A	Nipple, ø25.4mm, brass	
35	500159	Clamp, size 32, for hose end	
36	211685	Street Elbow, ø19mm, S/S**	

SD* - Static Dissipating

S/S** - Stainless Steel AISI 304

SC*** - Static Conductive

THE ABOVE PRICES ARE EXPRESSED IN € EURO FOB BOLOGNA, ITALIA - PRICES SUBJECT TO CHANGE WITHOUT NOTICE